

## Model PC420V Explosion Proof Series Velocity Loop Powered Sensors (LPS™)




### FEATURES:

- Peak equivalent or RMS or True Peak
- Explosion Proof Certification\*
- Corrosion resistant
- ESD protection
- Overload protection
- Reverse wiring protection

### BENEFITS:

- Choice of output: RMS, True Peak, and Peak, permits you to choose the sensor that best fits your industrial requirements
- Provides continuous trending of overall machine vibration
- True peak is useful for detecting loose parts like valves on reciprocating machinery
- Can help guide maintenance
- Helps notify of impending equipment failure
- Hazardous area installation

The output of the PC420V Series is proportional to velocity vibration. An output of 4 mA indicates a level of 0 IPS or no vibration present. A full-scale reading of 20 mA indicates that the maximum range (Peak or RMS) of vibration is present. The Peak output units provide a computed equivalent peak level of vibration based on the RMS.

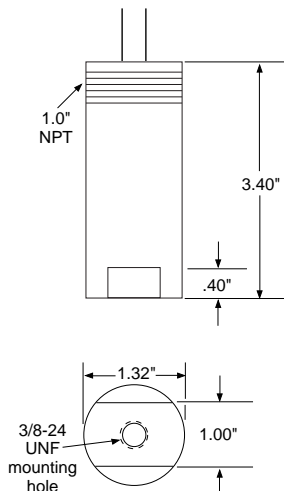

### OUTPUT, 4-20 mA

Full Scale, 20 mA (±5%) .....	see Table 1 on back
Frequency Response:	
±10% .....	10 Hz - 1.0 kHz
±3 dB .....	2 Hz - 2 kHz
Repeatability .....	±2%
Transverse Sensitivity, max. ....	5%

### ELECTRICAL

#### Power Requirements (Two wire loop power):

Voltage at PC420-series sensor terminals .....	14 VDC min, 30 VDC max
Loop Resistance <sup>1</sup> at 24 VDC, maximum .....	700Ω
Turn on time, 4-20 mA loop .....	< 10 seconds
Grounding .....	Case isolated, internally shielded

### ENVIRONMENTAL

Temperature Range .....	-40 to 85°C
Vibration Limit .....	250 g peak
Shock Limit .....	2,500 g peak
Sealing .....	Expoxy Sealed

### PHYSICAL

Sensing Element Design .....	PZT ceramic / shear
Weight .....	380 grams
Case Material .....	303 stainless steel
Mounting .....	3/8-24 x 3/8 depth tapped hole
Output Leads, 18 AWG .....	4 meters long

\* CSA Approval: Class 1, Division1, Groups A, B, C, D.  
ATEX Approval: EEx d IIC T3C  
EEx nA IIC T3C

CABLE	FUNCTION
Red	Loop Positive (+)
White	Loop Negative (-)

### ACCESSORIES SUPPLIED:

SF20-2 Mounting stud (International customers specify mounting requirements);  
Calibration data (level 2).



**Table 1: PC420Vx-yy-EX Explosion Proof Model Number Selection**

x (4-20 mA Output Type)	yy (4-20 mA Full Scale)
R = RMS output, Velocity	05 = 0.5 IPS
P = Equivalent Peak output, Velocity	10 = 1.0 IPS
TP = True Peak output, Acceleration	20 = 2.0 IPS
	30 = 3.0 IPS
	50 = 5.0 IPS

**NOTES:** <sup>1</sup> Maximum loop resistance (R<sub>L</sub>) can be calculated by:

$$R_L \text{ (max resistance)} = \frac{V_{\text{DC power}} - 10 \text{ V}}{20 \text{ mA}}$$

DC Supply Voltage	R <sub>L</sub> (max resistance) <sup>2</sup>	R <sub>L</sub> (minimum wattage capability) <sup>3</sup>
12 VDC	100Ω	1/8 Watt
20 VDC	500Ω	1/4 Watt
24 VDC	700Ω	1/2 Watt
26 VDC	800Ω	1/2 Watt
30 VDC	1.0kΩ	1/2 Watt

<sup>2</sup> Lower resistance is allowed, greater than 10Ω recommended.

<sup>3</sup> Minimum R<sub>L</sub> wattage determined by: (0.0004 x R<sub>L</sub>).

**Typical Circuit**

