




XtendaPole – *Extend Your Reach*

(Patent # 61239508)

XtendaPole is a high quality extension pole, designed for vibration analysts, by vibration analysts, to reach awkward or inaccessible vibration measurement points, safely and quickly.

Features

- Patented head assembly for quick and easy adjustment – spring loaded adjustment pin supports 5 sensor angles; adjustable head supports a variety of common sized vibration sensors **
- Anodized head finish for long lasting service
- Light weight head – 5.6 oz
- Positive lock for safe pole extension
- Non-conductive fiberglass handle for operator safety
- Cable management system for safe, easy cable placement

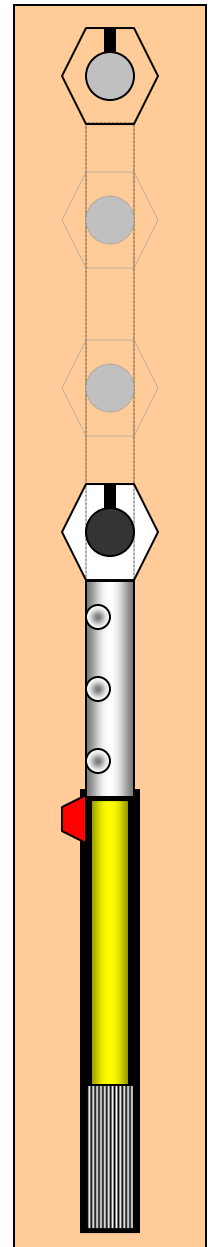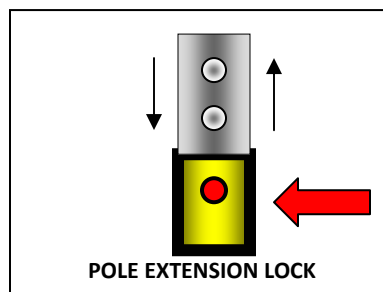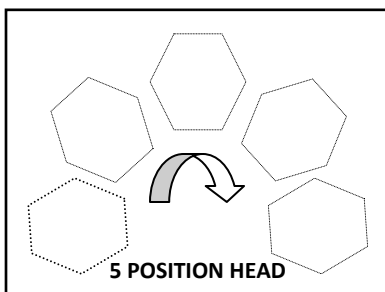

TO ORDER: email info@spectrum-instruments.com or contact a Spectrum Agent near you.


ORDERING INFORMATION

XTENDAPOLE	7	2	3	5	11
PRODUCT XTENDAPOLE	LENGTH 3.5 = 2.25' - 3.5' 7 = 4' - 7' 11 = 6' - 11' 14 = 8' - 14' 24 = 8' - 24'	BORE SIZE 1 = 0.875" 2 = 1.00" 3 = 1.250 4 = SPECIAL	ACCELEROMETER 0 = NONE 1 = 10 MV/G 2 = 50 MV/G 3 = 100 MV/G 4 = 500 MV/G	MAGNET 0 = NONE 1 = FLAT 10# 2 = FLAT 40# 3 = FLAT 60# 4 = MP 10# 5 = MP 30# 6 = MP 50# 7 = MP 95# 8 = MP 120# <small>MP = multipurpose</small>	CABLE ASSEMBLY ** 0 = NONE 1 = 6' BENTLY NEVADA 2 = 10' BENTLY NEVADA 3 = 16' BENTLY NEVADA 4 = 6' ADASH 5 = 10' ADASH 6 = 16' ADASH 7 = 6' COMMTEST 8 = 10' COMMTEST 9 = 16' COMMTEST 10 = 6' CSI 10, 15, 20 11 = 10' CSI 10, 15, 20 12 = 16' CSI 10, 15, 20 13 = 6' CSI 2130 14 = 10' CSI 2130 15 = 16' CSI 2130 16 = 6' DI 17 = 10' DI 18 = 16' DI 19 = 6' DLI SINGLE 20 = 10' DLI SINGLE 21 = 16' DLI SINGLE 22 = 6' WATCHMAN 23 = 10' WATCHMAN 24 = 16' WATCHMAN 25 = 6' DATALINE 26 = 10' DATALINE 27 = 16' DATALINE 28 = 6' DATAPAC 29 = 10' DATAPAC 30 = 16' DATAPAC 31 = 6' SCHENCK 32 = 10' SCHENCK 33 = 16' SCHENCK 34 = 6' SEMPAL 35 = 10' SEMPAL 36 = 16' SEMPAL 37 = 6' SKF CMVA10,55,60 38 = 10' SKF CMVA10,55,60 39 = 16' SKF CMVA10,55,60 40 = 6' SKF MLCMXA 41 = 10' SKF MLCMXA 42 = 16' SKF MLCMXA 43 = SPECIAL


CONFIGURE AN EXTENSION POLE THAT:

- BEST SUITS YOUR APPLICATION, AND
- IS DIRECTLY COMPATIBLE WITH YOUR EXISTING DATA COLLECTOR / ANALYZER




PHOTO GALLERY



Split head for sensor adjustment; pivot pull pin for 5 point head adjustment



Positive shaft position lock mechanism

Shows 3 of 5 available sensor angles (pull-pin adjustable) simplifying the attachment of sensor/magnetic mounts to any machine

** - incl. integral safety link

SPECTRUM INSTRUMENTS LTD.

44 Forest Drive. Brighton, ON Canada K0K 1H0

P: 800-778-3428

F: 866-782-0106

With Agents in: Australia, Canada, Costa Rica, Egypt, India, Indonesia, Malaysia, South Africa and the USA

Your local Spectrum Agent: